


**Product Description:**



La gamme Reflector-Fit™ est livrée avec un COB haute puissance qui peut fournir jusqu'à 122lm/W. Ce downlight est équipé d'un réflecteur en aluminium multifacettes, conçu pour un contrôle exceptionnel de la lumière et offrant un angle de diffusion de 60 degrés pour un éclairage d'accentuation maîtrisé. Disponible en quatre puissances différentes.

**Product Image:**

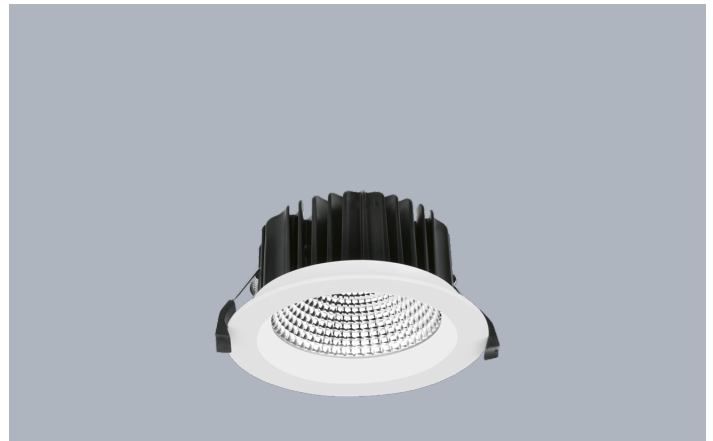

**Line Drawing**

**Polar Curve**

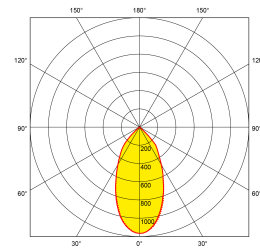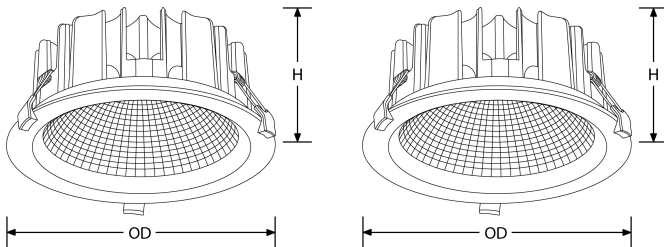

**Product Specs:**

|                                      |        |                                      |             |
|--------------------------------------|--------|--------------------------------------|-------------|
| <b>Technology</b>                    | LED    | <b>Input Voltage</b>                 | 200-240V AC |
| <b>Lifetime L70 (hrs)</b>            | 40.000 | <b>Input Frequency</b>               | 50/HZ       |
| <b>Dimmable</b>                      | Oui    | <b>Dali</b>                          | Non         |
| <b>IP Rating</b>                     | IP44   | <b>Operating Env. Temp. (Min) °C</b> | -20°C       |
| <b>Operating Env. Temp. (Max) °C</b> | 45°C   | <b>Optic Material</b>                | PMMA        |
| <b>Power Factor</b>                  | 0.9    | <b>Overall Diameter (mm)</b>         | 145         |
| <b>Height (mm)</b>                   | 65     | <b>Recess Depth (mm)</b>             | 90          |
| <b>Cutout Diameter (mm)</b>          | 130    | <b>Weight (Kg)</b>                   | 0.576       |

**SKU Table and Ordering:**

| SKU Code       | Wattage | Beam Angle | Lumens | Lumens/Watt | CRI | Colour | Finish Colour |
|----------------|---------|------------|--------|-------------|-----|--------|---------------|
| EN-DDL413/30   | 13      | 60         | 1420   | 110         | 80  | 3000   | Blanc         |
| EN-DDL413/40   | 13      | 60         | 1480   | 114         | 80  | 4000   | Blanc         |
| EN-DDL413DA/40 | 13      | 60         | 1480   | 114         | 80  | 4000   | Blanc         |
| EN-DDL413V/40  | 13      | 60         | 1480   | 114         | 80  | 4000   | Blanc         |

**Compliance & Approvals:**



## **Warranty:**

---

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

### **UK Head Office**

Apex Park

6 Little Burrow

Welwyn Garden City AL7 4SW

United Kingdom

Tel : +44 (0) 1707 228 700