

Product Description:



La gamme Reflector-Fit™ est livrée avec un COB haute puissance qui peut fournir jusqu'à 122lm/W. Ce downlight est équipé d'un réflecteur en aluminium multifacettes, conçu pour un contrôle exceptionnel de la lumière et offrant un angle de diffusion de 60 degrés pour un éclairage d'accentuation maîtrisé. Disponible en quatre puissances différentes.

Product Image:



Line Drawing

Polar Curve

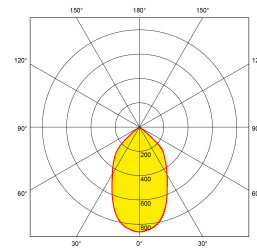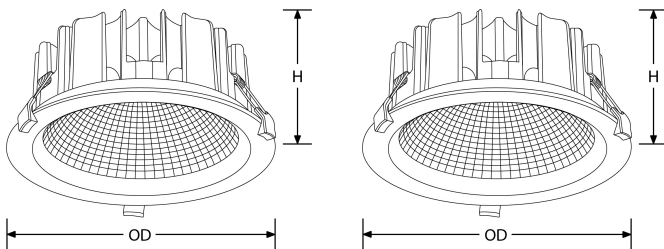

Product Specs:

Technology	LED	Input Voltage	200-240V AC
Positional Adjustment	Fixe	Lifetime L70 (hrs)	40.000
Input Frequency	50/HZ	Dimmable	Oui
Dali	Non	IP Rating	IP44
Operating Env. Temp. (Min) °C	-20°C	Operating Env. Temp. (Max) °C	45°C
Optic Material	PMMA	Power Factor	0.9
Overall Diameter (mm)	190	Height (mm)	75
Recess Depth (mm)	105	Cutout Diameter (mm)	170
Weight (Kg)	0.981		

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-DDL618/30	18	60	2110	118	80	3000	Blanc
EN-DDL618/40	18	60	2200	123	80	4000	Blanc
EN-DDL618DA/40	18	60	2200	123	80	4000	Blanc
EN-DDL618V/40	18	60	2200	123	80	4000	Blanc

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office

Apex Park

6 Little Burrow

Welwyn Garden City AL7 4SW

United Kingdom

Tel : +44 (0) 1707 228 700