

LUMINAIRES - ÉCLAIRAGE ENCASTRÉ COUPE-FEU

AU-MPRO2A


Product Description:

Adjustable, integrated, fire rated 6W LED downlight with unique convertible design to fit ceiling voids as shallow as 56mm. Incorporated miniaturised NanoDrive™ power supply. Available in 3000K and 4000K, mPro™ delivers up to 107lm/W making it the most efficient fire rated downlight on the market. Interchangeable bezels available in White, Matt White, Polished Chrome and Satin Nickel. FastRFix™ rapid install system connector included for faster installation. Rated to 30, 60 and 90 minute fire ceilings.


Product Image:



Line Drawing

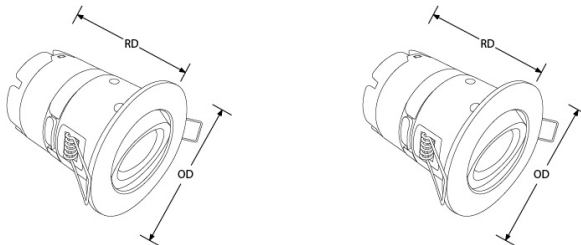

Polar Curve

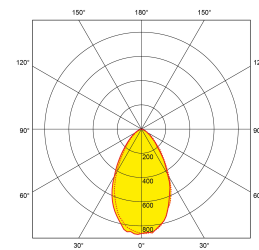

Product Specs:

Technology	LED	Input Voltage	220-240V AC
Positional Adjustment	Orientable	Positional Adjustment (°)	20
Luminaire Distribution	Direct	Lifetime L70 (hrs)	70000
Input Frequency	50/50HZ	Dimmable	Oui
IP Rating	IP65	Fire Protection	Oui
Acoustic Rated	Oui	Operating Env. Temp. (Min) °C	-20°C
Operating Env. Temp. (Max) °C	45°C	Power Factor	0.80
Overall Diameter (mm)	98	Height (mm)	100
Recess Depth (mm)	100	Cutout Diameter (mm)	85
Weight (Kg)	0.529		

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
AU-MPRO2AMW/30	6	60	610	102	80	3000	Blanc mat
AU-MPRO2AMW/40	6	60	640	107	80	4000	Blanc mat
AU-MPRO2APC/40	6	60	640	107	80	4000	Chromé
AU-MPRO2ASN/30	6	60	610	102	80	3000	Alu brossé
AU-MPRO2ASN/40	6	60	640	107	80	4000	Alu brossé
AU-MPRO2AW/30	6	60	610	102	80	3000	Blanc
AU-MPRO2AW/40	6	60	640	107	80	4000	Blanc

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office

Apex Park
6 Little Burrow
Welwyn Garden City AL7 4SW
United Kingdom
Tel : +44 (0) 1707 228 700